

APD 1000 C

Engine : Cummins
 Alternator : Aksa
 Control System : P 732 control system



ISO8528

This generator set has been designed to meet ISO 8528 regulation.

SZUTEST

This generator set is manufactured in facilities certified to ISO 9001.



This generator set is available with CE certification.

2000/14/EC

Enclosed product is tested EU noise legislation 2000/14/EC

3 Phase Ratings, 50 Hz, PF 0,8

Voltage	Standby Rating (ESP)		Prime Rating (PRP)		
	kVA	kW	kVA	kW	Amp
400/230	1000,00	800,00	920,00	736,00	1327,00

Standby Rating (ESP): Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

Prime Rating (PRP): Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

STANDARD SPECIFICATIONS

- Heavy duty, water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket cooling heater
- Steel base frame and anti-vibration isolators
- Spare Fuel Tank
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel belows supplied separately
- Static battery charger
- Manual for use and installation

OPTIONAL EQUIPMENTS

ENGINE

- Remote Radiator Cooling
- Fuel-Water Separator Filter
- Oil heater

ALTERNATOR

- Anti-Condensation Heater
- Main line circuit breaker

CONTROL SYSTEM

- Remote annunciator panel
- Earth fault, single set
- Charge Ammeter

OTHER ACCESSORIES

- Automatic or manual fuel filling system
- Low and high fuel level alarm
- Residential silencer
- Enclosure: weater protective or sound attenuated
- Trailer
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant - 30 °C
- Main Fuel Tank

TRANSFER SWITCH

-
-

APD 1000 C

Engine : Cummins
 Alternator : Aksa
 Control System : P 732 control system



➤ DIESEL ENGINE SPECIFICATIONS

Manufacturer		Cummins		
Model		KTA 38-G2A		
No. of Cylinders and Build		12-cylinder, V - Type		
Aspiration and Cooling		Turbo Charged and After Cooled		
Maximum Standby Power		1500 rpm		
		895 kW [1200HP]		
Total Displacement	L	38,00		
Bore and Stroke	mm	159 X 159		
Compression Ratio		14,5:1		
Rated Speed (rpm)	rpm	1500		
Governor		Electronic		
Oil Capacity	L	114,00		
Coolant Capacity	L	280,00		
Intake Air Flow	m ³ /min.	67,00		
Radiator Cooling Air	m ³ /min.	1500		
Exhaust Gas Flow	m ³ /min.	193,00		
Exhaust Gas Temperatures	° C	536		
Start System		24 V d.c.		
Fuel Consumption	Load	%100	%75	%50
	L/h	192,00	153,00	106,00

➤ ALTERNATOR SPECIFICATIONS

Make		Aksa
Model		AK7740
Frequency	Hz	50
Power	kVA	925
Design		Brushless, 4 poles
Cos Phi		0,80
Phase		3
Voltage	V	400/230
Current	A	1335
Insulation Class		H
Rotor		Single Bearing System, Flexible Disc
Excitation System		Electronic (AVR)

➤ DIEMENSIONS AND WEIGHT


Open Type	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
APD 1000 C	7750	4400	2060	2140	900
Sound Attenuated Type	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
AK 96	11500	7500	2300	2500	1500

APD 1000 C

Engine : Cummins
 Alternator : Aksa
 Control System : P 732 control system



1 P 732 control system - Control System

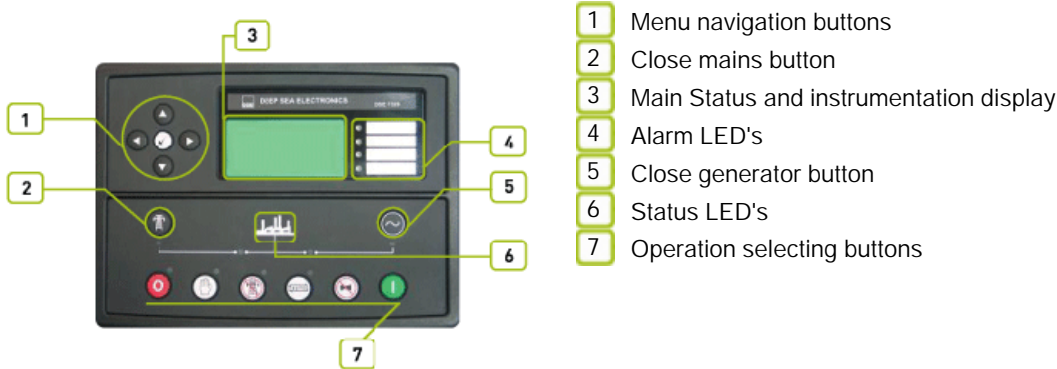

- 1 Menu navigation buttons
- 2 Close mains button
- 3 Main Status and instrumentation display
- 4 Alarm LED's
- 5 Close generator button
- 6 Status LED's
- 7 Operation selecting buttons

2 Devices

DSE, model 7320 Auto Mains Failure control module
 Static battery charger 5A, 220/240 volt
 Emergency stop push button and fuses for control circuits

3 Construction and Finish

Components installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface
 Polyester composite powder topcoat forms high gloss and extremely durable finish
 Lockable hinged panel door provides for easy component access

4 Installation

Control panel is mounted generating set baseframe on robust steel stand or power module.
 Located at side of generating set with properly panel visibility.

5 Generating Set Control Unit

HAY'8G9+' &\$ V&bfca cXi Y'jg'U'ghUbxUfX'UXX]hcb hc'ci f' [YbYfUhf'gYhg Zca '&) \$_J 5'i dk UfXg'UbX'ih\Uj Y VYYb XYg] bYX'hc'ghUfUbx'ghcd'X]YgY' UbX[Ug [YbYfUhf] 'gYhg'U'Uh]bWl XY'Y'YVfcb]WUbx' bcb Y'YVfcb]WYb[]bYg''HAY 8G9+' &\$]bWl XYg'AY'UXX]hcbU' WdUV]]mcZVY]b['UV'Y hc'a cb]hf'U'a U]bg'fi h]]mt'gi dd'mUbx]g'AYfYzcfY gi]hUV'Y Zcf'V&bfca]b['U'ghUbxVm[YbYfUhf] 'gYhg]b V&b' bVfcb'k]h' Ub'Ui hca U]WfUbgZf'gk]hV' HAY'8G9+' &\$ U'gc]bX]W]Yg'cdYfUhfcbU' ghU' g'UbX'Zji 'hV&bX]hcbgz'Ui hca U]W' mig'i h]b['Xck b'AY [YbYfUhf] 'gYhUbx]bX]W]h]b[Zji 'hg'Vma YUbg'cZ]hg '@7 8'X]gd'Umcb'AY ZfcbhdUbY''

Standard Specifications

- Microprocessor controlled
- 132 x 64 pixel LCD display makes information easy to read
- Front panel programming and also via PC software
- Soft touch membrane keypad and five key menu navigation
- Remote communications via RS232, RS485 and ethernet and SMS messaging
- Event logging (50) showing date and time
- Multiple date and time engine exercise mode and maintenance scheduler

APD 1000 C

Engine : Cummins
 Alternator : Aksa
 Control System : P 732 control system



Instruments

- ENGINE
- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- Battery volts
- Engine maintenance due
- GENERATOR
- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Earth current
- kW
- Pf
- kVAr
- kWh, kVAh, kVArh
- Phase sequence
- MAINS
- Voltage (L-L, L-N)
- Frequency

Protection Circuits

- WARNING
- Charge failure
- Battery under voltage
- Fail to stop
- Low fuel level (opt.)
- kW over load
- Negative phase sequence
- PRE-ALARMS
- Low oil pressure
- High engine temperature
- Low engine temperature
- Over /Under speed
- Under/over generator frequency
- Under/over generator voltage
- ECU warning
- SHUT DOWNS
- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature
- Low coolant level
- Over /Under speed
- Under/over generator frequency
- Under/over generator voltage
- Oil pressure sensor open
- Phase rotation
- ELECTRICAL TRIP
- Earth fault
- kW over load
- Generator over current
- Negative phase sequence

Options

- High oil temperature shut down
- Low fuel level shut down
- Low fuel level alarm
- High fuel level alarm
- EXPANSION MODULES
- Editional LED module (2548)
- Expension relay module (2157)
- Expansion input module (2130)

Standards

- Electrical Safety / EMC compatibility
- BS EN 60950 Electrical business equipment
- BS EN 61000-6-2 EMC immunity standard
- BS EN 61000-6-4 EMC emission standard

Static Battery Charger

6UHfVfUf[Yf]g'a Ubi ZUM fYX'k Jh'gk JhX]b[!a cXY'UbX'GA 8 fVWbc'c[mUbX'ih\Ug\[\ \ YZZV]bVWf
 6UHfVfUf[Yf'a cXY'gfci hdi hJ !=VUfUUVf]gh]W]g] YfmVcgy'hc'gei UfY'UbX'ci hdi h]g) Ua dYfz&('j c'h87""-bdi h% , !
 &* \$j c'h57""&(\$) \Ug z `mci hdi hg\chVfVW]hdfchVW]cb UbX'ihVWb'VY i gYX'Ug'U'W ffYbhgci fVW"
 &(\$) VUf[Yf\Ug\[\ \ YZZV]bVWf]cb["ZYz`ck ZU]i fY'fUfYz`[\ hnk Y][\hUbX`ck \YUhfUX]UfYX]b UVMcfXUbW'k Jh']bYUf
 U'YfbUf]j Yg"
 H\Y VUf[Yf]g ZHfX'k Jh' U'dfchVW]cb X]cXY'UVf'cggh'Y'ci hdi H'7'Uf[Y'ZU]`ci hdi h]g'Uj U]UV'Y""7 cbbYVWUf[Y'ZU]`fY'Um
 Vc]`VYfK YYb'dcg]h]j Y'ci hdi hUbX'7: `ci hdi H'

APD 1000 C

Engine : Cummins
 Alternator : Aksa
 Control System : P 732 control system



AK 96 - Canopy



- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Sump drains valves
- 6 Exhaust system in the canopy
- 7 Lockable, large doors on each side

Introduction

Sound-attenuated and Weather-protective Enclosures Sound-attenuated and weather protective enclosures for generating sets from Aksa, meet even the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies (300 - 1100kVA) provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

Standard Specifications

Compact footprint, low profile design.

Enclosure, generator set, exhaust system and fuel tank are pre-assembled, pre-integrated and shipped as one package

Body made from steel components treated with polyester powder coating

Fire retardant foam insulation

Easy access to all service points

Exhaust system inside canopy

Large doors on each side

Control panel viewing window in a lockable access door

Emergency stop push button mounted on enclosure exterior

Cooling fan and battery charging alternator fully guarded

Fuel fill and battery can only be reached via lockable access doors.

Lifting points on the top of canopy and base frame

Customer options available to meet your applications needs.

Aksa makes its generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been approved by the notified body Szutest

Width	mm.	2300
Length	mm.	7500
Height	mm.	2500
Fuel Tank Capacity		1500