

AC 66

Engine : Cummins
 Alternator : Mecc Alte
 Control System : P 72



ISO8528

This generator set has been designed to meet ISO 8528 regulation.

SZUTEST

This generator set is manufactured in facilities certified to ISO 9001.



This generator set is available with CE certification.

2000/14/EC

Enclosed product is tested EU noise legislation 2000/14/EC

3 Phase Ratings, 50 Hz, PF 0,8

Voltage	Standby Rating (ESP)		Prime Rating (PRP)		
	kVA	kW	kVA	kW	Amp
400/230	66,00	53,00	60,00	48,00	86,00

Standby Rating (ESP): Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

Prime Rating (PRP): Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

OPTIONAL EQUIPMENTS

ENGINE

- Fuel-Water Separator Filter
- Low water level alarm
- Oil heater

ALTERNATOR

- Anti-Condensation Heater
- Over sized alternator
- Main line circuit breaker

CONTROL SYSTEM

- Remote annunciator panel
- Earth fault, single set
- Charge Ammeter

OTHER ACCESSORIES

- Automatic or manual fuel filling system
- Manual oil drain pump
- Low and high fuel level alarm
- Residential silencer
- Enclosure: weater protective or sound attenuated
- Duct adapter (on radiator)
- Inlet and outlet motorised louvers
- Inlet and outlet acoustic baffles
- Trailer
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Double wall chassis
- Supplied with oil and coolant - 30 °C
- Battery isolating switch
- Main Fuel Tank

TRANSFER SWITCH

- Four Pole Contactor

AC 66

Engine : Cummins
Alternator : Mecc Alte
Control System : P 72

● DIESEL ENGINE SPECIFICATIONS

Manufacturer		Cummins		
Model		S3,8-G7		
No. of Cylinders and Build		4 Cylinder, In Line		
Aspiration and Cooling		Turbo Charged and After Cooled		
Maximum Standby Power		1500 rpm		
		65 kW[87HP]		
Total Displacement	L	3,80		
Bore and Stroke	mm	97 x 128		
Compression Ratio		17,5:1		
Rated Speed (rpm)	rpm	1500		
Governor		Mechanical		
Oil Capacity	L	11,00		
Coolant Capacity	L	19,00		
Intake Air Flow	m ³ /min.	4,60		
Radiator Cooling Air	m ³ /min.	116		
Exhaust Gas Flow	m ³ /min.	10,00		
Exhaust Gas Temperatures	° C	510		
Start System		12 V d.c.		
Fuel Consumption	Load	%100	%75	%50
	L/h	14,70	11,00	6,10

● ALTERNATOR SPECIFICATIONS

Make		Mecc Alte		
Model		ECO 32-2L/4		
Frequency	Hz	50		
Power	kVA	60		
Design		Brushless, 4 poles		
Cos Phi		0,80		
Phase		3		
Voltage	V	400/230		
Current	A	86		
Insulation Class		H		
Temperatur		H		
Stator		2 / 3 steps		
Rotor		Single Bearing System, Flexible Disc		
Excitation System		Electronic (AVR)		


● DIEMENSIONS AND WEIGHT

Open Type	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
AC 66	950	2150	1050	1450	240
Sound Attenuated Type	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
AK 40	1300	3100	1110	1750	240

AC 66

Engine : Cummins
 Alternator : Mecc Alte
 Control System : P 72

P 72 - Control System

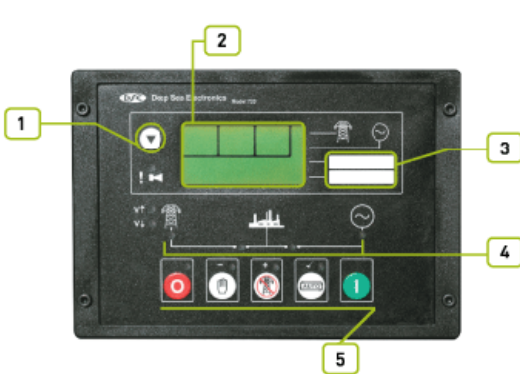

- 1 LCD display scroll button
- 2 LCD display
- 3 Additional alarm / Status LED's
- 4 Status LED's
- 5 Operation selecting buttons

Devices

DSE, model 720 Auto Mains Failure control module
 Static battery charger 5A, 220/240 volt
 Emergency stop push button and fuses for control circuits

Construction and Finish

Components installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface
 Polyester composite powder topcoat forms high gloss and extremely durable finish
 Lockable hinged panel door provides for easy component access

Installation

Control panel is mounted generating set baseframe on robust steel stand.
 Located at side of generating set with properly panel visibility.

Generating Set Control Unit

8G9'+&\$
 H\Y`8G9'+&\$`V`bfc`a cXi`Y`g`U`g`U`b`X`U`F`X`U`X`h`c`b`h`c`i`f`[`Y`b`Y`f`U`h`c`f`g`Y`h`i`d`h`c`&`\$`_`J`5`U`b`X`i`h`U`j`Y`V`Y`Y`b`X`Y`g`[`b`Y`X`h`c`g`U`f`h`U`b`X`g`h`c`d`X`Y`g`Y`U`b`X`[`U`g`[`Y`b`Y`f`U`h`b`[`g`Y`h`g`H\Y`8G9'+&\$`a`c`X`i`Y`U`g`V`Y`Y`b`X`Y`g`[`b`Y`X`h`c`a`c`b`[`h`c`f`[`Y`b`Y`f`U`h`c`f`Z`Y`e`i`Y`b`V`h`z`j`c`h`z`W`f`Y`b`h`z`Y`b`[`j`b`Y`c`]`d`f`Y`g`g`i`f`Y`z`V`c`U`b`h`i`Y`a`d`Y`f`U`h`i`f`Y`i`f`i`b`b`[`\`c`i`f`g`U`b`X`V`U`h`Y`f`m`j`c`h`g`"A`c`X`i`Y`a`c`b`[`h`c`f`g`h`Y`a`U`j`b`g`g`i`d`d`m`U`b`X`g`k`]`h`W`c`j`Y`f`h`c`h`Y`[`Y`b`Y`f`U`h`c`f`k`Y`b`h`Y`a`U`j`b`g`d`c`k`Y`f`Z`j`g`"
 H\Y`8G9'+&\$`U`g`c`]`b`X`]`W`h`Y`g`c`d`Y`f`U`h`c`b`U`g`h`U`h`g`U`b`X`Z`j`i`h`V`c`b`X`]`h`c`b`g`z`U`i`h`c`a`U`h`W`m`i`g`i`h`h`b`[`X`c`k`b`h`Y`[`Y`b`Y`f`U`h`b`[`g`Y`h`U`b`X`]`b`X`]`W`h`b`[`Z`j`i`h`g`V`m`i`a`Y`U`b`g`c`Z`]`h`g`@`7`8`X`]`g`d`U`m`i`c`b`h`Y`Z`c`b`h`d`U`b`Y`"

Standard Specifications
 Microprocessor controlled
 LCD display makes information easy to read
 Black-lit character/icon LCD display
 Transfer between mains (utility) and generator power
 On-site module configuration and remote configuration (max 100 meters) using PC software
 User-friendly set-up and button layout
 Front panel programming
 Remote start
 Multiple engine parameters are monitored simultaneously
 Controls: Stop/Reset, Manual, Auto, Test, Start, buttons. An additional push button next to the LCD display is used to scroll through the modules' metering displays

AC 66

Engine : Cummins
 Alternator : Mecc Alte
 Control System : P 72

Instruments

- ENGINE
- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- Battery volts
- GENERATOR
- Voltage (L-N)
- Current (L1-L2-L3)
- Frequency
- MAINS
- Voltage (L-L, L-N)

Protection Circuits

- WARNING
- Battery charge failure
- Low battery voltage
- SHUT DOWNS
- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature
- Over /Under speed
- Under/over generator frequency
- Failed to reach loading voltage
- Failed to reach loading frequency
- ELECTRICAL TRIP
- Generator over current

Options

- High oil temperature shut down
- Low fuel level alarm
- High fuel level alarm
- Low coolant level

Standards

- Electrical Safety / EMC compatibility
- BS EN 60950 Electrical business equipment
- BS EN 61000-6-2 EMC immunity standard
- BS EN 61000-6-4 EMC emission standard for the industrial environment

Static Battery Charger

6UHfVfmVUf[Yf]g'a Ubi ZUM fYX'k Jh'gk JhV]b[!a cXY'UbX'GA 8 'hVWbc'c[mUbX'ih\Ug'\][\ YZZV]bVh
 6UHfVfmVUf[Yf'a cXY'gfici hdi hJ !=VUfUfVWf]gh]W]g] YfmVbcgY 'tc'gei UfY'UbX'ci hdi h]g) 'Ua dYfz%&j c'h87''-edi h%, !
 &* \$j c'h57"
 %&\$) \Ug'Z 'mci hdi hg\chVfVW]hdfchVW]cb'UbX'ihVWb'VY' i gYX'Ug'U'VW'ffYbhgci fVW"
 %&\$) VUf[Yf\Ug'\][\ YZZV]bVh'z'cb["Z]Z'ck'Z]i fY'fUfYz'][\hk Y][\hUbX'ck \YUhfUX]UfYX']b'UWV'fXUbVW'k]h']bYUf
 U'fYfbU]j Yg"
 H\Y VUf[Yf]g'Z]hYX'k Jh' U'dfchVW]cb'X]cXY'UW'cgg'hY'ci hdi h'
 7\Uf[Y'Z] 'ci hdi h]g'Uj U]UV'Y'"7 cbbYVhVUf[Y'Z] 'fY'UmV' VYhk YYb'dcg]h] Y'ci hdi hUbX'7: 'ci hdi h'

AC 66

Engine : Cummins
 Alternator : Mecc Alte
 Control System : P 72

AK 40 - Canopy



- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Sump drains valves
- 6 Sound proof foam material
- 7 Lifting Points

Introduction

Sound-attenuated and Weather-protective Enclosures Sound-attenuated and weather protective enclosures for generating sets from Aksa, meet event the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies (10- 300kVA) provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

Standard Specifications

Compact footprint, low profile design.

Enclosure, generator set, exhaust system and fuel tank are pre-ssembled, pre-integrated and shipped as one package

Body made from steel components treated with polyester powder coating

Fire retardant foam insulation

Easy access to all service points

Exhaust system inside canopy

Large doors on each side

Control panel viewing window in a lockable access door

Emergency stop push button mounted on enclosure exterior

Cooling fan and battery charging alternator fully guarded

Fuel fill and battery can only be reached via lockable access doors.

Lifting points on the top of canopy and base frame

Customer options available to meet your applications needs.

Aksa makes its generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been approved by the notified body Szutest

Width	mm.	1110
Lenght	mm.	3100
Height	mm.	1750
Fuel Tank Capacity		240